




**American Braiding & Manufacturing**  
247 Old Tavern Road  
Howell, New Jersey 07731 USA  
Phn 800-899-5018 / 732-938-6333  
Fax 732-938-6377

**Style Number:** 300  
**Service:** Pump Packing  
**Product Type :** Braided Packing

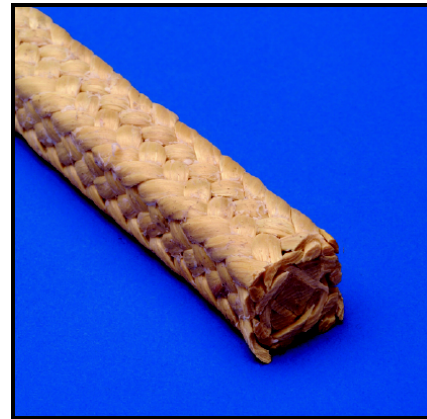

**Description:**

Braided from continuous Aramid filament, Style 300 is impregnated with PTFE and a proprietary inert lubricant. Our unique braiding technique makes our Style 300 easy to cut and install, with excellent braid retention. Style 300 is also non-staining and non-contaminating packing with excellent heat dissipation properties. The high tensile strength of Aramid fiber makes this packing ideally suited for slurry or any abrasive service where media is highly aggressive.

<b>Construction:</b>	Interlock Braid
<b>Temperature Rating:</b>	500° F / 260°C
<b>pH Rating:</b>	2 – 12
<b>Shaft Speed Rating:</b>	2200 FPM / 11 MPS
<b>Pressure Rating:</b>	500 PSI / 34 BAR