




American Braiding & Manufacturing
247 Old Tavern Road
Howell, New Jersey 07731 USA
Phn 800-899-5018 / 732-938-6333
Fax 732-938-6377

Style Number: 3000G
Service: Pump and Valve Packing
Product Type : Braided Packing

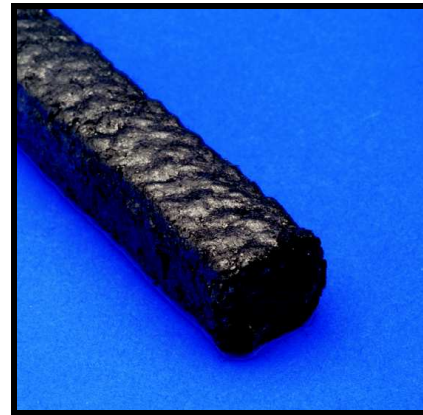

Description:

Braided from continuous Acrylic blended fiber, Style 3000G is impregnated with our proprietary high temperature lubricant, and pre and post lubricated with high purity graphite flake. Our unique lubrication process insures a dense but flexible general service packing, which can be used in most steam, water, salt water, oil, and mild acid or alkali applications.

Construction:	Interlock Braid
Temperature Rating:	500° F / 260°C to -170°F / 110°C
pH Rating:	4 – 10
Shaft Speed Rating:	1000 FPM / 5 MPS
Pressure Rating:	300 PSI / 20 BAR