




American Braiding & Manufacturing
247 Old Tavern Road
Howell, New Jersey 07731 USA
Phn 800-899-5018 / 732-938-6333
Fax 732-938-6377

Style Number: 3000T
Service: Pump and Valve Packing
Product Type : Braided Packing

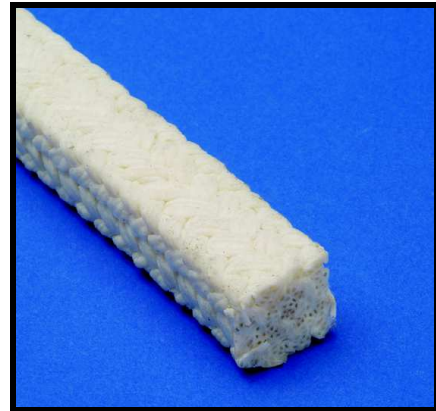

Description:

Braided from continuous Acrylic blended fiber, Style 3000T is impregnated with PTFE and a proprietary inert lubricant. Style 3000T packing is also a non-staining and non-contaminating packing with excellent heat dissipation properties. A durable and resilient packing for general service applications such as centrifugal, rotary, and reciprocating pumps, as well as valve service. Our proprietary lubricant is used for extremely low friction at startup and during operation.

Construction:	Interlock Braid
Temperature Rating:	500° F / 260°C
pH Rating:	2 – 12
Shaft Speed Rating:	2200 FPM / 11 MPS
Pressure Rating:	500 PSI / 34 BAR