




American Braiding & Manufacturing
247 Old Tavern Road
Howell, New Jersey 07731 USA
Phn 800-899-5018 / 732-938-6333
Fax 732-938-6377

Style Number: 8000TK
Service: Pump and Valve Packing
Product Type : Braided Packing

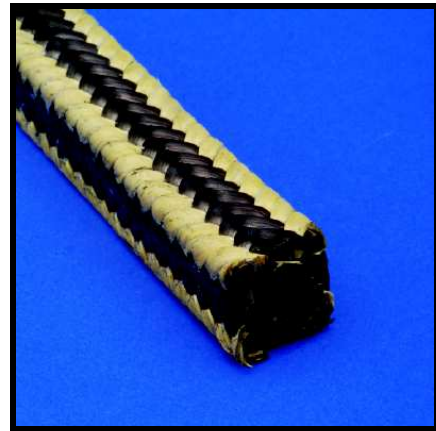

Description:

Braided from genuine GFO® fiber, a filament yarn made from finely ground particles of high quality graphite incapsulated in a Teflon® matrix to eliminate graphite migration, and Kevlar® corners for superior abrasion resistance. For use in valves, Centrifugal pumps, rotary pumps, reciprocating pumps, this packing is ideal for use in most corrosive and abrasive applications.

Construction:	Interlock Braid
Temperature Rating:	550° F / 275°C
pH Rating:	0 - 14
Shaft Speed Rating:	2500 FPM / 13 MPS
Pressure Rating:	300 PSI / 20 BAR